

Features and Benefits




* Shown with optional backlit sign box.

- **Replaceable front ATM panel with recessed ATM opening** protects your ATM
- **Recessed based on front body panel** allows for vehicle bumper clearance
- **Accommodates night depository or VAT system**
- **Patented Straight Line Suspension (SLS) System** distributes the ATM weight throughout the kiosk frame
- **Seamless, composite roof with internal drainage system** prevents leakage and eliminates unsightly streaking
- Includes **climate control system**
- Offers **multiple areas for network affiliation display and graphic panels**
- Optional **backlit sign box**
- Meets **seismic zone 4 requirements, wind shear 120 mph**, and is built to **UL standards**. UL listing available.

Materials

Fiberglass composite shell
Interior steel structure

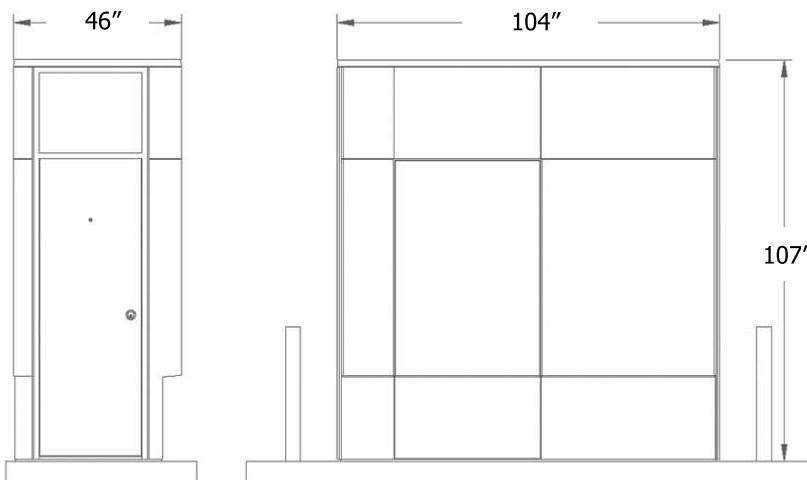

ATM Compatibility

Diebold
Opteva 740, 1073i, 1073ix, 1077ix

NCR
5688, 5887, 5888

Wincor Nixdorf
ProCash 2250, ProCash 2250xe

Nautilus Hyosung
Monimax 5100T, 7000D, 7600D

Tranax
MBS5000DR (6" tunnel only)

Triton
FT5000
Patent: US 6,457,277 B1